

# Installation Instructions for Nidus Mediterranean Lever Privacy Adaptor

## Important note: Before you start

Measurements stated in these instructions relate to a standard 35mm thick door. During installation, carefully determine the correct length needed for the emergency release bar by placing both the privacy snib and emergency release housings to the door and ensuring that the emergency release bar fits fully into the emergency release slot and still has an allowance for a 7mm protrusion on the privacy snib side (as pictured in fig. 1).

The emergency release bar needs to be fully through the emergency release hole at the time the 7mm protrusion on the privacy snib side is measured.

There needs to be a 7mm protrusion where the release bar sits 2mm out from the snib side housing.

If the emergency release bar is cut too short it may work loose and fall out of the emergency release hole, and the emergency release will cease to function. As doors vary in thickness, this procedure needs to be performed for each door

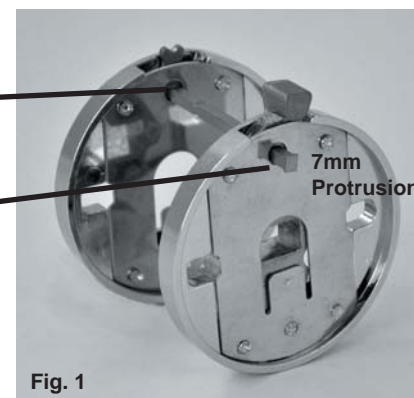


Fig. 1



Fig. 4



Fig. 5



Fig. 6

**Step 1:** Prepare the holes in door as per the Nidus Mediterranean lever passage set instructions. Up to a 50mm hole can be used. Insert the tubular latch.

**Step 2:** Insert brass posts into the lever backplate that has horizontal threaded post holes, as pictured in Fig 5. These horizontal brass posts fit through the corresponding holes in a standard tubular latch.

**Step 3:** Check whether the handle with the brass posts attached is to be used on the snib side or emergency release side of the door. Position the appropriate housing for that lever over the brass posts, as shown in Fig 6. If the privacy snib housing side is fitted at this point, insert the emergency release bar at this stage, as shown in Fig 1.



Fig. 7



Fig. 8

**Step 4:** Insert Privacy adaptor spindle (the spindle supplied with the lever passage set may be too short) through the tubular latch cam and into the lever handle spindle hole, as shown in Fig 7.

**Step 5:** Insert Privacy adaptor spindle (as the spindle supplied with the lever passage set may be too short) through the tubular latch cam as shown in Fig 8. and into the lever handle spindle hole. Insert the emergency release bar so that the bar is passes through the emergency release hole on the other side of the door, yet making sure there is still a 7mm protrusion as shown in Fig 8 & Fig 1.



Fig. 9

**Step 6:** Place remaining lever handle backplate over the Privacy Adaptor spindle and tighten screws, checking that the handles are in the horizontal position, as shown in Fig 9.



Fig. 10

**Step 7:** Place lever cover rings over the lever backplates, as shown in Fig 10, and check to make sure both the privacy snib and emergency release functions are operational.

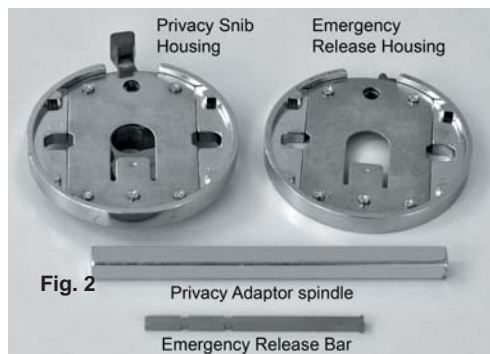


Fig. 2

**Fig 1: List of components.**

Note: the Privacy Adaptor is to be used in conjunction with the Nidus Mediterranean range of lever passage sets only.



Fig. 3

**Fig 2: How it all fits together:**

Shows how all the privacy adaptor components fit with the lever passage set and latch. Note: The privacy snib and emergency release tab can be installed above or below the handles.